

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
13 November 2003 (13.11.2003)

PCT

(10) International Publication Number
WO 03/094553 A1

- (51) International Patent Classification?: **H04Q 7/22**
- (21) International Application Number: PCT/IB02/01518
- (22) International Filing Date: 6 May 2002 (06.05.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ROOKE, Michael** [FI/FI]; Anttilantie 21A, FIN-05840 Hyvinkää (FI). **SAVINEN, Teppo** [FI/FI]; Männiköntie 23 D 12, FIN-03400 Vihti (FI). **HOLOPAINEN, Tapio** [FI/FI]; Selkämerenkatu 16 A 7, FIN-00180 Helsinki (FI).
- (74) Agent: **KURIG, Thomas**; Becker, Kurig, Straus, Bavariastrasse 7, 80336 München (DE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND DEVICE FOR DELIVERING MESSAGES TO MOBILE TERMINAL DEVICES IN ACCORDANCE WITH A USER SELECTABLE ATTAINABILITY STATUS

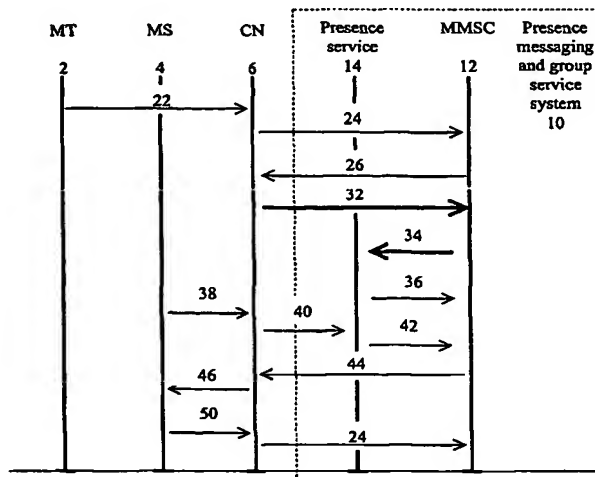

(57) Abstract: Method and device for delivering messages to mobile terminal devices by proceeding in case of an unsuccessful message delivery attempt to said mobile terminal device from a Store-and-Forward Entity of a mobile communication network with a presence service. The method comprises the reception of a notification about an unsuccessful delivery attempt of a message, and a subscription to a presence service for future notifications of the status of a terminal device. The method and a service is provided for executing a communication attempt following an unsuccessful delivery attempt of a message to with a mobile terminal device in a communication network. This invention allows to reduce the conventionally necessary multiple delivery attempts to just one. The Store-and-Forward Entity does this by subscribing to the presence service in case of a mobile terminated delivery attempt to be performed.

**METHOD AND DEVICE FOR DELIVERING MESSAGES
TO MOBILE TERMINAL DEVICES IN ACCORDANCE WITH
A USER SELECTABLE ATTAINABILITY STATUS**

The present invention relates to cellular communication networks having the capability to transmit messages such as multi media messages, short messages, and the like. It also relates to a method for delivering messages in accordance with an attainability status of a mobile terminal device selectable by a user. The present invention relates to a method to initiate message delivery attempts to mobile terminal devices with a minimized waste of network resources. The invention further relates to a mechanism inside a Multimedia Message Service Center (MMSC), a Short Message Service Center (SMSC), or a Store-and-Forward Entity (SFE) to provide notifications for calling applications or network devices for informing them, if mobile devices are going to accept incoming messages or not.

Currently, if a mobile terminal device is connecting to a network, a notification is sent to a presence service in the network, so that the network is informed, if the handset is reachable or not. This is executed independently of the presence of a message to be transferred. An SFE in the network usually repeatedly starts delivery attempts until the message can be delivered and a confirmation notification is received. In case the message can not be delivered, the amount of data to be transferred for the multiple delivery attempts of a single message may increase unnecessarily. So it would be desirable to reduce these unsuccessful message delivery attempts, to save network resources. Additionally, a user does not have the choice to reject incoming short messages or multi media messages except when turning off the mobile terminal device. Otherwise he may risk to overflow the message memory of his terminal device. Typically, a server would subscribe to a users presence information, and when the presence status changes it will be notified and can take appropriate actions before delivering a message. The problem here is that the server e.g. MMSC must subscribe to the presence information for every user in the network.

Sometimes it would be desirable for a user to be able to select the attainability status of his mobile terminal device, in accordance with the available communication channels. Presently, the SMs are sent anyway, and there is presently no way, e.g. in the European Telecommunication Standard Institute (ETSI) specifications, to reject the reception of certain kind of messages.

The standard procedures for delivering SMs can be found in the ETSI specifications for GSM for Short Messages Service (SMS). The standard procedures for delivering MMSs are going to be found in the ETSI specifications for the 3rd Generation Partnership Project (3GPP).

It is desirable to reduce unnecessary data transfer in mobile communication networks, in the case of a failed delivery attempt of a message.

It is further desirable to have a method and a device capable of determining, if a user is willing to receive messages on his mobile terminal device.

According to one embodiment of the invention a method is provided, for managing a message to be transmitted to a mobile terminal device from a Store-and-Forward Entity (SFE) of a mobile communication network, in the case that the message could not be delivered during the first delivery attempt. According to this embodiment of the invention, a method for delivering messages to a mobile terminal device is provided for proceeding with the delivery of a message by receiving a notification about an unsuccessful delivery attempt of a message and subscribing to notifications from a presence service. The present method is to reduce the data transferred if a single message cannot be delivered during the first delivery attempt.

The notification about an unsuccessful delivery attempt is sent to the SFE from the CN, the SFE is no longer occupied with the delivery of said message, as it is now subscribed to a presence service to tell when the next delivery attempt is to be performed. The main advantage is that this subscription is transmitted only once, if a message could not be successfully transmitted in the first attempt. If a device is not available or will not accept a message, only one subscription to the presence service to be notified is transmitted to the presence service, instead of multiple delivery attempts to be performed. Naturally, the SFE may further comprise internal timers to discard a message after a predetermined time, to prevent a SFE memory overflow.

The best example for illustrating this would be a mobile phone user, who is receiving only periodically MMSs, but is frequently using the subway. A mobile terminal device of such a user may be not available for 3 to 4 times a day but may receive only one message a week. Such a behavior of a user leads to two different scenarios: A permanent notification about the availability of the user device can lead to the fact that the availability notifications from the presence service outnumber the message delivery attempts. Additionally the system can not predict when the user will be available again, so a large number of delivery attempts may be necessary to deliver a single message. Preferably, the use of the method for transmitting

messages may be related to a number of messages and changes in availability of said mobile terminal device. So the best and most effortless method for delivering messages can be chosen.

Advantageously, the method further comprises, receiving a presence service status change message about said mobile terminal device of a change of said availability information, and starting a delivery attempt of said message to said mobile terminal device in accordance with said received presence service status change message.

Advantageously, said messages are multi media messages. The method may be applied to any other message type in said communication network. The more different types of messages are available, the more efficient the method can be used. The less different types of messages are available, the simpler the use of the method is.

In accordance with the invention the method further comprises : receiving of a message destined for a mobile terminal device. This receiving step enables the method to operate fully store-and-forward. This paragraph is only to emphasize that the method can be applied to messages received for forwarding and to messages generated in the SFE. So in the case of e.g. a terminal device classified as unwilling to receive MMS, the SFE may generate an SMS to inform the terminal of MMS waiting for delivery.

Conveniently, the method further comprises the checking of availability information of said mobile terminal device via a presence service for the availability of said mobile terminal device. This step is corresponding to the checking of the HLR (home location register) in the case of the SMS (short message system).

According to one embodiment of the invention a method is provided, for managing a message to be transmitted to a mobile terminal device from a Store-and-Forward Entity (SFE) of a mobile communication network. The method comprises the checking of availability information of said terminal device with a presence service for the acceptance of said message by said terminal device, and, starting a delivery attempt of said message to said terminal device, in accordance with the result of said checking. This checking of the acceptance of said message by said mobile terminal device in the communication network can be performed simultaneously with said checking of the availability / presence of said mobile terminal device or prior or after said checking of the availability / presence of said mobile terminal device.

By checking a service for the acceptance of a message by said mobile terminal device, the usually performed checking of the presence or the availability of said mobile terminal device may be

economized. It is possible to reduce the signaling load to the SFE present in the network, as the whole data traffic for updating the presence service can be reduced. The updating of the presence service may even only be performed, if a message is to be send or transmitted.

The store and forward entity (SFE) can be e.g. a SMSC (Short message service center), a MMSC (multi media message service center) or an evolutionary combination for future networks wherein the individual roles of the SMSC and MMSC are likely to be combined in a single "Store-and-forward Service Center" SFSC that is connected to at least one communication network. The SFE can be incorporated in a service center for other services e.g. a news service or in a gateway connected to multiple communication networks, such as the internet, mobile communication networks, cellular phone networks, or local area networks, like Bluetooth or LAN/WLAN. The method is performed by querying a presence service in or connected to said SFE, for obtaining a presence information of said mobile terminal device, if it is going to accept said message. It is to be noted that the term "accepting" is chosen to emphasize that not only the ability of the mobile terminal device is queried but even other criteria are used to detect the acceptance for said message. The presence service can be incorporated in the SFE or can be incorporated in a server connected to the SFE via said communication network.

Preferably, said availability information for the acceptance of said messages by said mobile terminal device comprises information selected from the group of : type of message, size of the message, data contents of the message, location of said mobile terminal device and willingness of the user of said mobile terminal device to receive a message. By using such differentiated information for the acceptance of a message, said presence service can be used as a filter to select certain messages, not to be transmitted e.g. different messages such as MMS, SMS or any other message type to be developed.

Preferably, said availability information for acceptance for said message is depending on the properties of said message. Conveniently, said properties are selected from the group of : message type, message size, sender type, and sender. This feature enables a user of a mobile terminal device to select different types of messages to be delivered directly, e.g. all text messages without graphic elements, so save memory space of the mobile terminal device or the like. This feature also enables a user to select or to reject messages from a certain sender which usually transmits e.g. advertisements, or to suppress the delivery of sound data as the mobile terminal may not be capable of processing these data. The feature makes specific filtering available at the presence service or the presence server.

Conveniently, said availability information of said mobile terminal device in said presence

service can arbitrarily be changed by receiving a presence service status change message from said mobile terminal device. The main advantage of said message is the ability to freely select an availability status, so that a user can decide and select what, and what kind of message he wants to receive. The message can be sent directly from the mobile phone, or maybe from any device authorized to perform the change in the presence service. This enables a user to e.g. use an internet access point to change or optimize the entries in the presence service of his mobile terminal device.

According to another aspect of the present invention, a software tool for initiating a delivery attempt of a message to a mobile terminal device in accordance with the availability status of said mobile terminal device in a presence service of a communication network is provided, which comprises program code means for performing all of the steps of the preceding description when said program is run on a SFE or a network device.

According to another aspect of the present invention, a computer program for executing a delivery attempt of a message to mobile terminal device in accordance with the availability status of said mobile terminal device in a communication network is provided, which comprises program code means for performing all of the steps of the preceding description when said program is run on a SFE or a network device.

According to yet another aspect of the invention, a computer program product is provided, comprising program code means stored on a computer readable medium for carrying out the method for executing a delivery attempt of a message to a mobile terminal device in accordance with an acceptance information of said mobile terminal device in a cellular communication network is provided by the preceding description when said program product is run on a computer or a network device.

According to another embodiment of the invention a Store-and-Forward Entity (SFE) is provided, that is capable of executing the method of the preceding description. The SFE is connected to a communication network that comprises a presence service, which can e.g. be incorporated in a respective presence server. The SFE is characterized by: a component for receiving a notification about an unsuccessful delivery attempt of a message, and a component for subscribing to said presence service for future notifications of the attainability status.

Preferably, the SFE further comprises a component for checking availability information of a presence service for the acceptance of said message by said mobile phone. The SFE further comprises a component to perform a delivery attempt of said message to said mobile terminal

device. These both components enable the SFE to determine the acceptance to receive a certain message by said mobile terminal device.

Preferably, the SFE further comprises a component for checking availability information of a presence service for the availability of said mobile terminal device. This component can be an independent component or may be combined with said component to check the acceptance of said message in a single check presence information component.

Advantageously, said SFE further comprises a component to receive messages to be delivered to said mobile terminal device. This component enables a fully store-and-forward capability, enabling the SFE to operate as a Store-and-Forward Service Center. Preferably, the component to receive messages is capable to receive messages from an other communication network than that to which the terminal device is connected. This would provide some kind of MMS-GSMC Multimedia Message System – Gateway Mobile service Switching Center or a SFE-GMSC, a Store-and-Forward Entity – Gateway Mobile service Switching Center. It may be noted that the SFE according to the present invention can be incorporated e.g. in a personal mobile gateway device, too, and is not only restricted to cell-phone and internet.

Conveniently, said SFE further comprises a component to subscribe to the presence service. This embodiment of the present invention can be utilized, if a direct notification to the presence service is not intended.

Advantageously, said presence service contains information for acceptance of said message, which depends on at least one information selected from the group of : message type, message size, sender type, sender, the location of said mobile terminal device, and maybe the willingness of the user of said mobile terminal device to receive a certain type of message. The presence service for the acceptance of messages may also be used as some kind of a message reception filter.

Preferably, said SFE further comprises a component to change said availability information in said presence service of said mobile terminal device according to the reception of a presence service status change message from said mobile terminal device.

In the following, the invention will be described in detail by referring to the enclosed drawings in which:

Figure 1 is a flowchart of a successful delivery of a MMS in a communication network,

according to the present invention, and

Figure 2 is a flowchart of a failed delivery attempt of a message according to one embodiment of the present invention.

Figure 1 is a flowchart of a successful delivery of a MMS in a communication network. In the first step a mobile terminal 2 transfers 22 a multi media message to a communication network (CN) 6. The communication network 6 can be one or more base transceiving systems, base stations, repeaters or service providers or any other relaying elements in the respective communication network. The message is transferred from the CN 6 to the Multimedia Message Service Center (MMSC) 12 (on the role of said SFE) in the presence messaging and group services system 10 (Presence Messaging and Group System). This describes that the mobile terminal 2 submits a message to the store and forward entity 12. The presence messaging and group services system 10 is depicted to indicate that the method is not restricted to a single communication network, but can be applied to communication network clusters, of different communication networks connected via gateways such as e.g. personal mobile gateways, too. Then a message delivery is attempted:

The MMSC 12 directly transfers the message back to the CN 6, after requesting availability information from the presence service 14. The presence service 14 can be incorporated in a presence server, or may be incorporated in the MMSC 12 in the network. The CN 6 in turn transfers 46 the message to the mobile station 4. The mobile station 4 returns 50, 24 a confirmation about the successful delivery of said message to the MMSC 12 via the CN 6. A normal message delivery identifies the problem area: If the mobile station 4 is not available the message will fail, the MMSC 12 must therefore subscribe to every user/mobile station presence information from a presence service 14, before attempting a delivery (not shown). In reality this means even, if the MMSC 12 is not delivering a message, it will still receive traffic relating to the presence of a user or a mobile station and hence the traffic load here may actually be more than that normally used to delivery messages.

Figure 2 is a flowchart of a failed delivery attempt of a MMS in a communication network. The first steps of the method are basically the same as in figure 1. In the first step a mobile terminal 2 transfers 22 a multi media message to a base station or CN 6. The message is transferred 24 from the CN 6 to the MMSC 12 in the presence messaging and group services system 10. The MMSC 12 directly transfers 26 the message back to the CN 6, which in turn tries to transfer the message to the mobile station 4. The message delivery will sometimes fail and at this point the MMSC 12 (in the role of the SFE) contacts the presence server to subscribe to the messaging

presence information. The transfer of the message fails, and the CN 6 returns “failed delivery” response 32 back to the MMSC 12. Following that, the MMSC 12 will request to be informed of a notification 34 to the presence service 14 regarding the availability of said mobile station 4. The presence service 14 returns a confirmation 36 of said change in the availability status back to the MMSC 12. The MMSC 12 waits for a notification about a change in the availability status of the mobile station 4 in the presence service 14.

At some point in the future, the receiving MS of the message will perform an update about its messaging presence information: If the mobile station 4 changes its availability status, it notifies 38, 40 the presence service 14 about the change in the availability status, via the CN 6. When notified, the presence service 14 notifies 42 the MMSC 12 of the change. The presence server will then notify the MMSC 12 (per subscription, the MMSC 12 does not receive ALL the presence information changes, but only this particular MS 4 in this case). The MMSC 12 starts a further delivery attempt 44, 46 of the message to the mobile station 4 via the CN 6. The MMSC 12 will attempt message delivery, which should succeed knowing the MS 4 is present. As in figure 1, the mobile station 4 returns 50 a confirmation about the successful delivery of said message to the MMSC 12 via the CN 6. The notification of the change can also be transferred from the mobile station 4 to the presence service 14 via the MMS 12. It is also optional at this point that the MMSC 12 unsubscribes to the presence information, because the MMSC 12 does not want to receive any further message presence notifications of MS 4.

In case of a failed delivery attempt, a subscription/notification to the presence service/server is triggered. This is an important aspect of the present invention, to entrust another entity of the network to report that a device is able to receive a message. This reduces the operations and the transmissions necessary for a successful delivery of a message. To emphasize this point, the respective arrows 32, 34 in the FIG. 2 are depicted bold. Here the MMSC 12 attempts delivery without prior knowledge of the state of the mobile terminal device, if the mobile terminal device is online/available the message is successful as identified in figure 1, otherwise it will fail and trigger a request from the MMSC to the presence service for the subscribers presence. Once the mobile terminal device/subscriber is available the presence server is notified from the mobile terminal device/subscriber. The presence server then notifies the MMSC and the MMSC attempts the message delivery.

It is to be noted that the subscription request 34 from the MMSC 12 to the presence service 14 about availability of said mobile station 4 stated here is generic. It is to be noted, that further enhancement of this method can include subscription to attributes specific to messaging, for example: Subscribe to the user presence only for multimedia messaging. Here the notifications

are only relating to MMS.

Because of the subscription to the presence information, it is not longer necessary to perform the delivery attempts all the time. The delivery attempts are only performed when a notification from the presence server is received. So the number of delivery attempts are reduced and hence the traffic is reduced.

It should further be noted that messages flowing above have been assigned generic names, they can quite easily be mapped to Session Initiation Protocol (SIP) specific message types, e.g. NOTIFY and SUBSCRIBE. An UN-Subscribe may also be requested from the MMSC 12 to the presence service 14 once the message has been delivered to the mobile terminal 4.

It is further to be noted that the expressions "mobile terminal device" and "mobile station" are used synonymously.

It is further to be noted, that in the present invention the presence services for the presence of said mobile terminal device and for the acceptance of a message by said terminal device can be integrated in a single presence service, or may be incorporated in different devices in the network.

This application contains the description of implementations and embodiments of the present invention with the help of examples. It will be appreciated by a person skilled in the art that the present invention is not restricted to details of the embodiments presented above, and that the invention can also be implemented in another form without deviating from the characteristics of the invention. The embodiments presented above should be considered illustrative, but not restricting. Thus the possibilities of implementing and using the invention are only restricted by the enclosed claims. Consequently various options of implementing the invention as determined by the claims, including equivalent implementations, also belong to the scope of the invention.

Claims

1. Method for delivering messages to a mobile terminal device in case of an unsuccessful message delivery attempt to said mobile terminal device from a Store-and-Forward Entity (SFE) of a mobile communication network having a presence service, said presence service providing an information about the attainability of said mobile terminal device, characterized by:
 - receiving a notification about an unsuccessful delivery attempt of said message, and
 - subscribing to said presence service for receipt of notifications about the attainability of said mobile terminal device.
2. Method according to claim 1, further comprising:
 - receiving a status change notification message from said presence service about said mobile terminal device having a change of said availability information,
 - starting a delivery attempt of said message to said mobile terminal device, in accordance with said received status change notification message.
3. Method according to claim 1 or 2, wherein said message is a multi media message.
4. Method according to anyone of the preceding claims, further comprising receiving of said message to be transmitted to said mobile terminal device.
5. Method according to anyone of the preceding claims, further comprising checking availability information of said mobile terminal device in said presence service for the availability of said mobile terminal device.
6. Method according to anyone of the preceding claims, further comprising:
 - checking availability information of said mobile terminal device in said presence service for an acceptance of said message by said mobile terminal device,
 - initiating a delivery attempt of said message to said mobile terminal device, in accordance with the result of said checking.
7. Method according to claim 6, wherein said availability information for the acceptance of said messages by said mobile terminal device comprises information selected from a group of : type of message, size of the message, data content of the message, location of said mobile terminal device and willingness of a user of said mobile terminal device to receive a message.

8. Method according to claim 7, wherein said availability information for acceptance for said message is depending on properties of said message.
9. Method according to claim 8, wherein said properties are selected from a group comprising message type, message size, sender type, and sender.
10. Method according to anyone of the claims 6 to 9, wherein said availability information of said mobile terminal device in said presence service can arbitrarily be changed by receiving said presence service status change message from said mobile terminal device.
11. Software tool for performing a delivery attempt of a message to a mobile terminal device in accordance with the information related to the availability status of said mobile terminal device in a communication network, comprising program code means for carrying out the steps of anyone of claims 1 to 10 when said software tool is implemented in a program run on a Store-and-Forward Entity or a network device.
12. Computer program for performing a delivery attempt of a message to a mobile terminal device in accordance with the availability status of said mobile terminal device in a communication network, comprising program code means for carrying out the steps of anyone of claims 1 to 10 when said program is run on a Store-and-Forward Entity or a network device.
13. Computer program product comprising program code means stored on a computer readable medium for carrying out the method of anyone of claims 1 to 10 when said program product is run on a Store-and-Forward Entity or a network device.
14. Store-and-Forward Entity connected to a mobile communication network having a presence service for store-and-forwarding a message to a mobile terminal device, characterized by:
 - a component for receiving a notification about an unsuccessful delivery attempt of said message, and
 - a component for subscribing to said presence service for receipt of notifications about the attainability status of said mobile terminal device.
15. Store-and-Forward Entity according to claim 14, further characterized by:
 - a component for checking availability information of a presence service for an acceptance of said message by said mobile phone, and
 - a component to initiate a delivery attempt of said message to said mobile terminal device, in

accordance with the operation of said checking component.

16. Store-and-Forward Entity according to claim 15, further comprising a component for checking availability information of said presence service for the availability of said mobile terminal device.
17. Store-and-Forward Entity according to claim 15 or 16, further comprising a component for receiving messages to be transmitted to said mobile terminal device.
18. Store-and-Forward Entity according to anyone of claims 14 to 17, further comprising said presence service.
19. Store-and-Forward Entity according to claim 18, wherein said presence service provides an information about acceptance of said message selected from the group comprising : message type, message size, message content, sender type, sender, and location of said mobile terminal device.
20. Store-and-Forward Entity according to claim 18 or 19, further comprising a component to change said availability information in said presence service of said mobile terminal device according to the reception of a presence service status change message from said mobile terminal device.

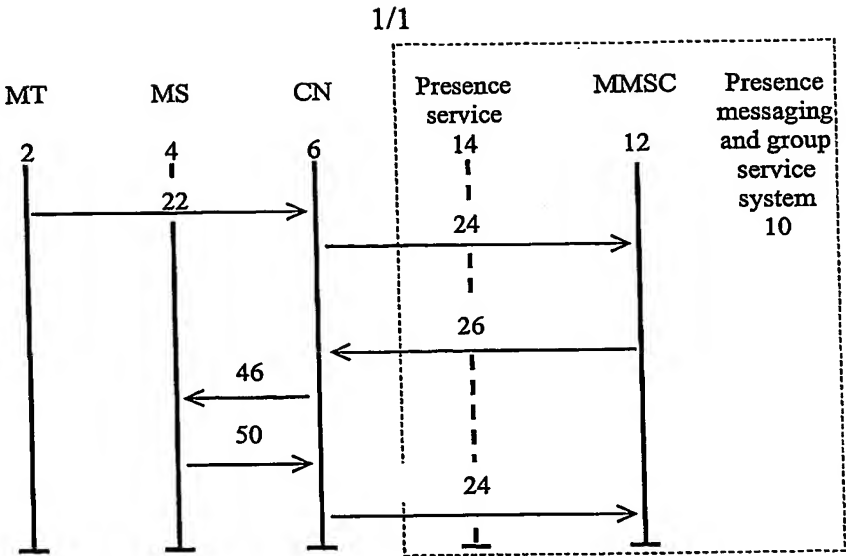


FIG. 1

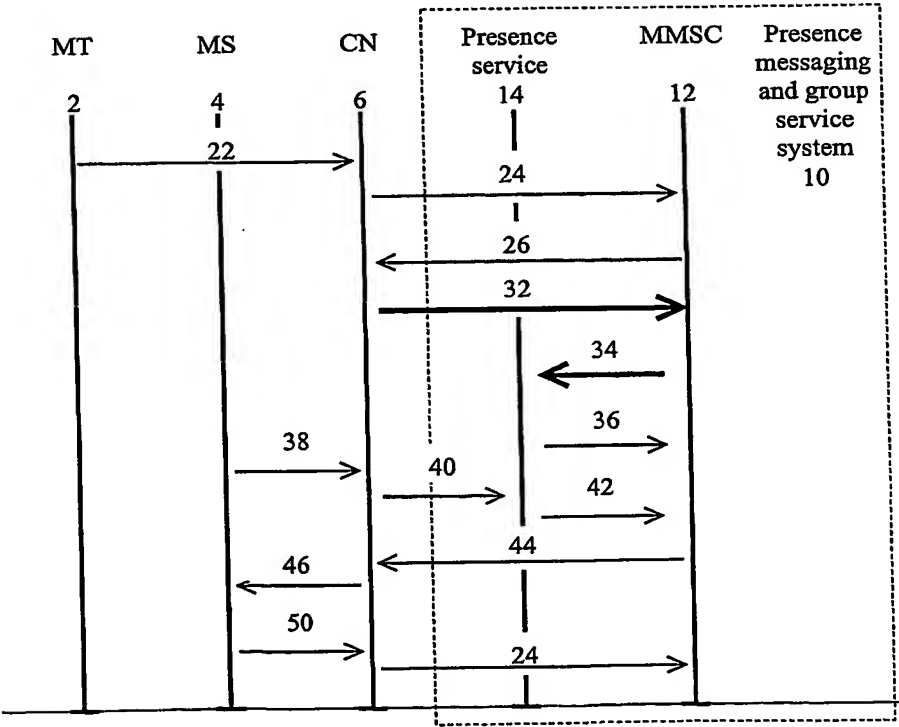


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 02/01518

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q, H04L, H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5628051 A (SALIN), 6 May 1997 (06.05.97), column 4, line 30 - column 6, line 65, abstract --	1-20
P,A	WO 0243351 A2 (AT & T WIRELESS SERVICES, INC), 30 May 2002 (30.05.02), page 1 - page 4; page 16 - page 20 --	1-20
X	WO 9926432 A1 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 27 May 1999 (27.05.99), page 1 - page 6, abstract	1-6,11-18
A	-- -----	7-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 December 2002

Date of mailing of the international search report

09-12-2002

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Thomas Tholin/EK


Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB 02/01518

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5628051	A	06/05/97	AT	208552 T	15/11/01
				AU	671186 B	15/08/96
				AU	5817494 A	15/08/94
				CN	1059067 B	29/11/00
				CN	1101489 A	12/04/95
				DE	69428941 D,T	29/05/02
				EP	0631708 A,B	04/01/95
				FI	802 U	12/07/93
				FI	92364 B,C	15/07/94
				FI	930172 D,V	22/03/93
				JP	7504792 T	25/05/95
				NO	309350 B	15/01/01
				NO	943009 A	14/09/94
				WO	9416532 A	21/07/94
WO	0243351	A2	30/05/02	AU	1979602 A	03/06/02
				US	2002083127 A	27/06/02
WO	9926432	A1	27/05/99	AU	1267699 A	07/06/99
				CN	1279864 T	10/01/01
				EP	1033043 A	06/09/00
				TR	200001397 T	00/00/00
				US	6259925 B	10/07/01

10/5/2/01



PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY (Chapter II of the Patent Cooperation Treaty)

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 50970	FOR FURTHER ACTION See Form PCT/IPEA/416	
International application No. PCT/IB2002/001518	International filing date (day/month/year) 06-05-2002	Priority date (day/month/year)
International Patent Classification (IPC) or national classification and IPC H04Q 7/22		
Applicant Nokia Corporation et al		

- This report is the international preliminary examination report, established by this International Preliminary Examining Authority under Article 35 and transmitted to the applicant according to Article 36.
- This REPORT consists of a total of 3 sheets, including this cover sheet.
- This report is also accompanied by ANNEXES, comprising:
 - ☒ (sent to the applicant and to the International Bureau) a total of 3 sheets, as follows:
 - ☒ sheets of the description, claims and/or drawings which have been amended and are the basis of this report and/or sheets containing rectifications authorized by this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions).
 - ☐ sheets which supersede earlier sheets, but which this Authority considers contain an amendment that goes beyond the disclosure in the international application as filed, as indicated in item 4 of Box No. I and the Supplemental Box.
 - ☐ (sent to the International Bureau only) a total of (indicate type and number of electronic carrier(s)) _____, containing a sequence listing and/or tables related thereto, in computer readable form only, as indicated in the Supplemental Box Relating to Sequence Listing (see Section 802 of the Administrative Instructions).
- This report contains indications relating to the following items:

<input checked="" type="checkbox"/>	Box No. I	Basis of the report
<input type="checkbox"/>	Box No. II	Priority
<input type="checkbox"/>	Box No. III	Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
<input type="checkbox"/>	Box No. IV	Lack of unity of invention
<input type="checkbox"/>	Box No. V	Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
<input type="checkbox"/>	Box No. VI	Certain documents cited
<input type="checkbox"/>	Box No. VII	Certain defects in the international application
<input type="checkbox"/>	Box No. VIII	Certain observations on the international application

Date of submission of the demand 16-09-2003	Date of completion of this report 28-07-2004
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. +46 8 667 72 88	Authorized officer Peter Hedman/MN Telephone No. +46 8 782 25 00

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY

International application No.

PCT/IB2002/001518

Box No. I Basis of the report

1. With regard to the language, this report is based on the international application in the language in which it was filed, unless otherwise indicated under this item.

- ☐ This report is based on a translation from the original language into the following language _____, which is the language of a translation furnished for the purposes of:
- ☐ international search (under Rules 12.3 and 23.1(b))
 - ☐ publication of the international application (under Rule 12.4)
 - ☐ international preliminary examination (under Rules 55.2 and/or 55.3)

2. With regard to the elements of the international application, this report is based on *(replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report)*:

- ☐ the international application as originally filed/furnished
- ☒ the description:
- pages 1 - 9 _____ as originally filed/furnished
- pages* _____ received by this Authority on _____
- pages* _____ received by this Authority on _____
- ☒ the claims:
- pages _____ as originally filed/furnished
- pages* _____ as amended (together with any statement) under Article 19
- pages* 10 - 12 received by this Authority on 2004 - 05 - 06
- pages* _____ received by this Authority on _____
- ☐ the drawings:
- pages 1 _____ as originally filed/furnished
- pages* _____ received by this Authority on _____
- pages* _____ received by this Authority on _____
- ☐ a sequence listing and/or any related table(s) – see Supplemental Box Relating to Sequence Listing.

3. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheets/figs _____
- ☐ the sequence listing (*specify*): _____
- ☐ any table(s) related to the sequence listing (*specify*): _____

4. ☐ This report has been established as if (some of) the amendments annexed to this report and listed below had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheets/figs _____
- ☐ the sequence listing (*specify*): _____
- ☐ any table(s) related to the sequence listing (*specify*): _____

* If item 4 applies, some or all of those sheets may be marked "superseded."

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY

International application No.

PCT/IB2002/001518

Box No. V Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Claims	<u>1-16</u>	YES
	Claims		NO
Inventive step (IS)	Claims	<u>1-16</u>	YES
	Claims		NO
Industrial applicability (IA)	Claims	<u>1-16</u>	YES
	Claims		NO

2. Citations and explanations (Rule 70.7)

The claimed invention relates to a method, a Store-and Forward Entity and software adapted for delivering messages for which an unsuccessful attempt to deliver has been executed at a previous stage. The proposed delivering procedure is achieved by way of providing a presence service. A notification about the attainability of the receiving terminal device is received at a Store-and Forward entity upon discovering that the receiving entity is attainable.

In the international search report the following document was cited and was considered to be of relevant importance:

D1 WO 9926432 A1

The cited document represents the general state of the art. The invention defined in the amended claims 1-16 is not disclosed by this document.

The cited prior art does not give any indication that would lead a person skilled in the art to the claimed method of providing detailed differentiated information in order to indicate the acceptance of a message. Nor does the cited prior art lead a person skilled in the art to a software tool, a computer program or a Store-and-Forward Entity which is operating in accordance the method suggested in any of claims 1-8. Therefore, the claimed invention is not obvious to a person skilled in the art.

Accordingly, the invention defined in claims 1-16 is novel and is considered to involve an inventive step. The invention is industrially applicable.

Application number: PCT/IB 02/01518
Applicant: Nokia Corporation et al.
Date:

May 03, 2004

New Claims

1. Method for delivering messages to a mobile terminal device in case of an unsuccessful message delivery attempt to said mobile terminal device from a Store-and-Forward Entity (SFE) of a mobile communication network having a presence service, said presence service providing an information about the attainability of said mobile terminal device, characterized by:
 - receiving a notification about an unsuccessful delivery attempt of said message, and
 - subscribing to said presence service for receipt of notifications about the attainability of said mobile terminal device,
 - checking availability information of said mobile terminal device in said presence service for an acceptance of said message by said mobile terminal device,
 - initiating a delivery attempt of said message to said mobile terminal device, in accordance with the result of said checking,wherein said availability information for the acceptance of said messages by said mobile terminal device comprises information selected from a group of: type of message, size of the message, data content of the message, location of said mobile terminal device and willingness of a user of said mobile terminal device to receive a message.
2. Method according to claim 1, further comprising:
 - receiving a status change notification message from said presence service about said mobile terminal device having a change of said availability information,
 - starting a delivery attempt of said message to said mobile terminal device, in accordance with said received status change notification message.
3. Method according to claim 1 or 2, wherein said message is a multi media message.
4. Method according to anyone of the preceding claims, further comprising receiving of said message to be transmitted to said mobile terminal device.
5. Method according to anyone of the preceding claims, further comprising checking availability information of said mobile terminal device in said presence service for the availability of said mobile terminal device.

6. Method according to anyone of the preceding claims, wherein said availability information for acceptance of said message is depending on properties of said message.
7. Method according to claim 6, wherein said properties are selected from a group comprising: message type, message size, sender type, and sender.
8. Method according to anyone of the preceding claims, wherein said availability information of said mobile terminal device in said presence service can arbitrarily be changed by receiving said presence service status change message from said mobile terminal device.
9. Software tool for performing a delivery attempt of a message to a mobile terminal device in accordance with the information related to the availability status of said mobile terminal device in a communication network, comprising program code means for carrying out the steps of anyone of claims 1 to 8 when said software tool is implemented in a program run on a Store-and-Forward Entity or a network device.
10. Computer program for performing a delivery attempt of a message to a mobile terminal device in accordance with the availability status of said mobile terminal device in a communication network, comprising program code means for carrying out the steps of anyone of claims 1 to 8 when said program is run on a Store-and-Forward Entity or a network device.
11. Computer program product comprising program code means stored on a computer readable medium for carrying out the method of anyone of claims 1 to 8 when said program product is run on a Store-and-Forward Entity or a network device.
12. Store-and-Forward Entity connected to a mobile communication network having a presence service for store-and-forwarding a message to a mobile terminal device, characterized by:
- a component for receiving a notification about an unsuccessful delivery attempt of said message, and
 - a component for subscribing to said presence service for receipt of notifications about the attainability status of said mobile terminal device, and
 - said presence service,
- wherein said presence service provides an information about acceptance of said message selected from the group comprising: message type, message size, message content, sender

type, sender, and location of said mobile terminal device.

13. Store-and-Forward Entity according to claim 12, further characterized by:

- a component for checking availability information of a presence service for an acceptance of said message by said mobile phone, and
- a component to initiate a delivery attempt of said message to said mobile terminal device, in accordance with the operation of said checking component.

14. Store-and-Forward Entity according to claim 13, further comprising a component for checking availability information of said presence service for the availability of said mobile terminal device.

15. Store-and-Forward Entity according to claim 13 or 14, further comprising a component for receiving messages to be transmitted to said mobile terminal device.

16. Store-and-Forward Entity according to anyone of the claims 12 to 15, further comprising a component to change said availability information in said presence service of said mobile terminal device according to the reception of a presence service status change message from said mobile terminal device.